



COMPLETE BOX SIDE VIEW


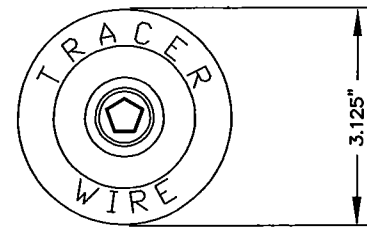


LID TOP VIEW

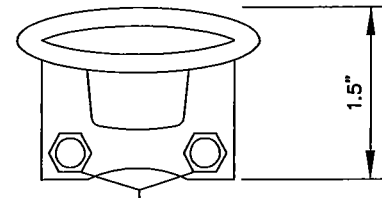

STAINLESS STEEL  
TERMINAL BOLTS

LID SIDE VIEW

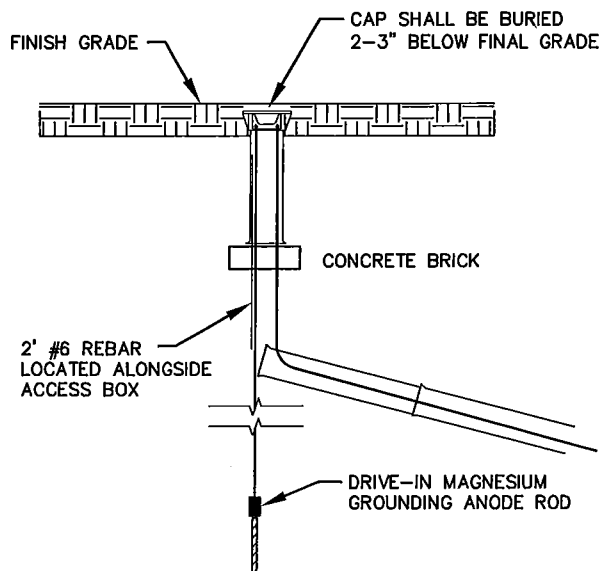

COLLAR VIEW TOP

TRACER WIRE ACCESS BOX SHALL BE A DRAINAGE & WATER SOLUTIONS MODEL #TRWAB OR APPROVED EQUAL. BOXES CONSTRUCTED IN PAVED AREAS REQUIRE THE INSTALLATION OF A FORD TYPE A SINGLE LID COVER OR APPROVED EQUAL. LEAVE A MINIMUM OF 2' OF TRACER WIRE SLACK IN BOX.

TRACER WIRE ACCESS BOX SHALL BE PAINTED BY THE CONTRACTOR IN THE FIELD WITH ENAMEL PAINT IN THE CORRESPONDING COLOR

- WATER = BLUE
- STORM SEWER/SUMP/SANITARY = GREEN
- ELECTRICAL = RED
- COMMUNICATION = ORANGE
- GAS = YELLOW

NOTES:

CASTING MUST CONFORM TO:  
ASTM SPECIFICATION A-48 CLASS 30  
COUNTRY OF ORIGIN: USA

ABS SHAFT MUST CONFORM TO:  
ASTM SPECIFICATIONS D-1788  
COUNTRY OF ORIGIN: USA



CITY OF EDINA  
ENGINEERING  
& PUBLIC  
WORKS  
DEPTS.

## TRACER WIRE ACCESS BOX

*[Signature]*

APPROVED: CITY ENGINEER

REVISED:  
01-16

STANDARD  
PLATE

110